

Load Centers

Load Center Replacement and OEM Interiors

1ø: Small Circuit Main Lug Interiors

Amps	Catalog Number ^①	Circuits	Spaces	Dimensions		List Price \$
				Height	Width	
60	I0204ML1125	2	2	5.06	2.12	33.50
60	I0303ML3100	3	3	5.06	3.12	63.00
125	I0408ML1125	4	8	4.51	6.61	61.00
125	I0816ML1125CU	8	16	6.19	6.81	116.00
125	I0816ML1125CUSP	8	16	6.19	6.81	116.00
200	I0202L1200	4	4	3.88	7.13	71.00

Small circuit Interiors

The small circuit interiors are ideal for OEM applications requiring only a few circuits. They can also be purchased as replacement items for:

- I0204ML1125 – Interior for LC100CS, LW100CR
- I0303ML3100 – Interior for LP003CS
- I0408ML1125 – Interior for L(C,W)004N(F,S,R)
- I0816ML1125CU – Interior for L(C,W)008D(F,S,R)
- I0202L1200 – Interior for JC0202 Meter Mains

Ultimate 1ø: High Circuit Main Lug Interiors with Neutral Bars^③

Amps	Catalog Number ^①	Circuits	Spaces	Dimensions		List Price \$
				Height	Width	
125	I1224L1125CU	12	24	10.80	9.80	140.00
125	I1624L1125CU	16	24	12.80	9.80	164.00
125	I2424L1125	24	24	16.80	9.80	187.00
125	I3040L1125CU	30	40	20.80	9.80	210.00
200	I0816L1200CT ^②	8	16	10.80	9.80	175.00
200	I1224L1200CU	12	24	10.80	9.80	200.00
200	I2040L1200CU	20	40	14.80	9.80	245.00
200	I3040L1200CU	30	40	20.80	9.80	364.00
200	I4040L1200CU	40	40	24.80	9.80	400.00
225	I4242L1225CU	42	42	26.80	9.80	527.00

Rock Solid 1ø: High Circuit Main Lug Interiors (no neutrals)^③

Amps	Catalog Number ^①	Circuits	Spaces	Dimensions		List Price \$
				Height	Width	
125	IR1224L1125	12	24	10.80	7.40	105.00
125	IR1632L1125	16	32	12.80	7.40	130.00
125	IR2040L1125CU	20	40	14.80	7.40	153.00
125	IR3040L1125	30	40	20.80	7.40	176.00
200	IR0816L1200TR ^②	8	16	10.80	7.40	140.00
200	IR2040L1200CU	20	40	14.80	7.40	200.00
200	IR2440L1200	24	40	16.80	7.40	223.00
200	IR3040L1200CU	30	40	20.80	7.40	245.00
200	IR4040L1200CU	40	40	24.80	7.40	317.00
225	IR4242L1225CU	42	42	26.80	7.40	409.00

Ultimate 1ø: Parallel Lug Interiors with Neutral Bars


Amps	Catalog Number ^①	Circuits	Spaces	Dimensions		List Price \$
				Height	Width	
200	CTI1224L1125CU	12	24	10.80	9.80	300.00
200	CTI2040L1200CU	20	40	14.80	9.80	444.00
200	CTI2440L1200CU	24	40	16.80	9.80	469.00
200	CTI3040L1200CU	30	40	20.80	9.80	527.00

3ø: Main Lug Interiors

Amps	Catalog Number ^①	Circuits	Spaces	Dimensions		List Price \$
				Height	Width	
125	I1224L3125CU	12	24	10.50	8.70	270.00
200	I1224L3200CU	12	24	10.50	8.70	293.00
200	I1836L3200CU	18	36	13.50	8.70	351.00
200	I2442L3200CU	24	42	16.50	8.70	409.00
200	I3042L3200CU	30	42	19.50	8.70	550.00
225	I4242L3225CU	42	42	25.50	8.70	644.00

Lug Data

Interior	Amperage	Wire range	Torque
I0204ML1060	60	2/0 - 4 AWG	45 lb. - ins.
I0303ML3100	100	2/0 - 4 AWG	45 lb. - ins.
I1224ML1100	100	2/0 - 4 AWG	45 lb. - ins.
I0408ML1125	125	2/0 - 4 AWG	45 lb. - ins.
I0816ML1125CU/CUSP	60	2/0 - 4 AWG	45 lb. - ins.
Ultimate	125	2/0 - 4 AWG	110 lb. - ins.
Ultimate	200/225	300 kcmil - 4 AWG	110 lb. - ins.
Rock Solid	125	2/0 - 4 AWG	110 lb. - ins.
Rock Solid	200/225	300 kcmil - 4 AWG	275 lb. - ins.
Three Phase	125	300 kcmil - 6 AWG	340 lb. - ins.
Three Phase	200/225	300 kcmil - 6 AWG	340 lb. - ins.

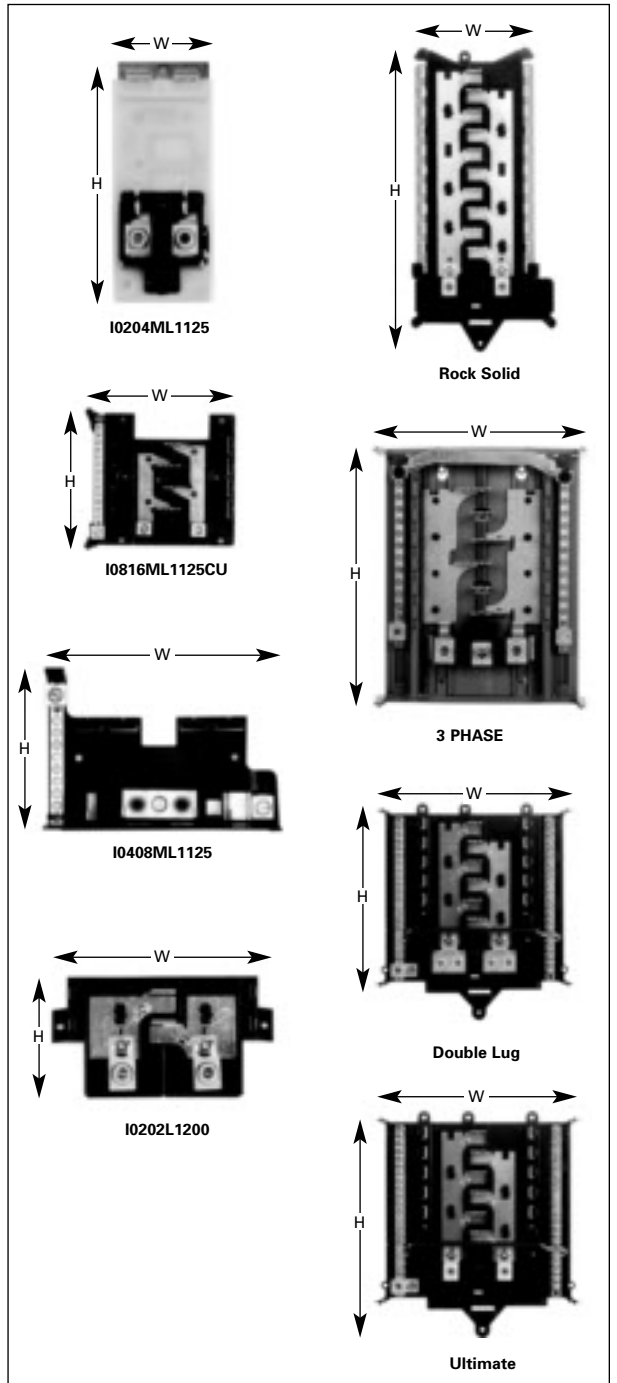

① The letters "CU" in any catalog number represent copper bus bars.

② Convertible to main breaker using the MBK main breaker kits

③ Feed thru lugs provided