


Uni-Pak Metering: Ringless Style with Lever Bypass

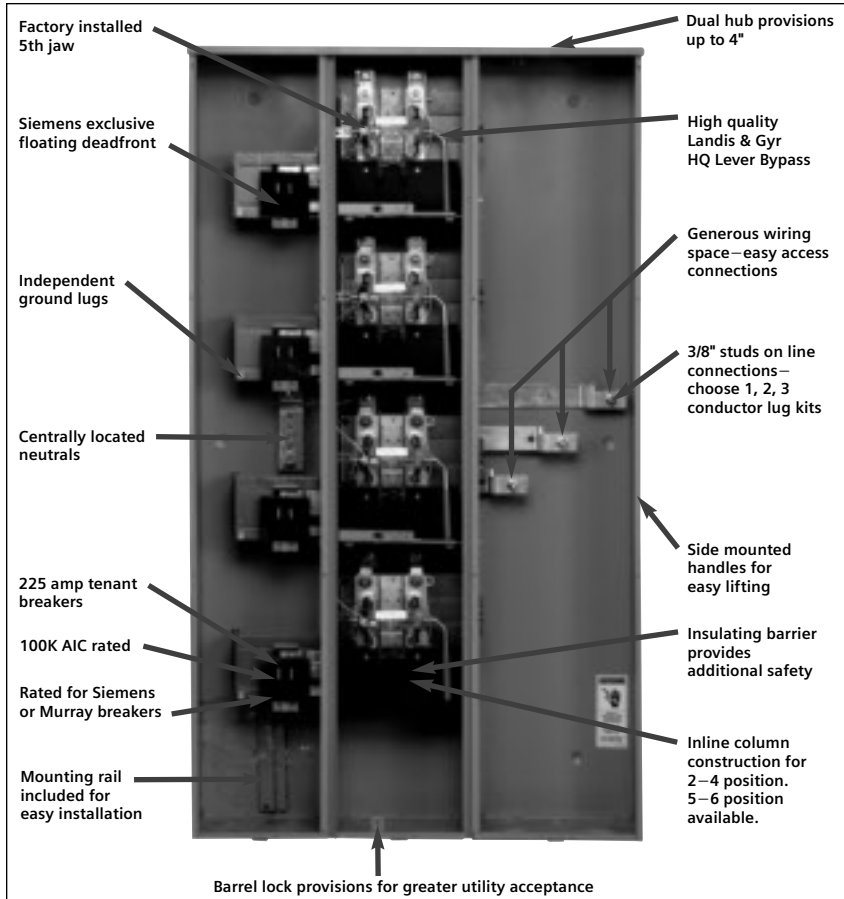

The newly designed line of PAK metering from Siemens is now available for those utilities that require a lever bypass for residential & commercial applications. PAK Metering provides an all-in-one solution for applications needing from 2–6 meter positions. The products are designed for easy installation and include features not found on competitors, including:

- Side mounted handles to help in lifting
- "Floating" deadfront to help breaker alignment
- Provisions for one, two, or three incoming conductors per phase and neutral
- Hanging bracket to suspend the unit during installation
- 225 amp branch tenant provisions @ 100,000 AIC
- Full line of 2–6 position devices
- "In-line" (column) construction for 2–4 position devices

Siemens PAK metering has passed rigorous testing and has been accepted by many of those utilities that require a lever bypass.

Note: KO diagrams located on page 3-51.

METERING 3

Continuous Duty Amps Per Position	Maximum Tenant Breaker	Bus Amperage	Meter Positions Per Pak	Catalog [®] Number	List Price \$	Breaker Provision	Maximum AIC	Dimensions (inches) ^①			5th Jaw @ 9:00	Line Lugs ^②
								Height	Width	Depth		
1-Phase 5-Jaw sockets, 120/240V AC Max.												
200	225	400	2	SP4212RJL	3274.00	MP-T, MP-HT,	100,000	36.75	35.90	9.00	Installed	3/8"
			3	SP4312RJL	4911.00	MP-MT, MP-T,	100,000	49.75	35.90	9.00	Installed	Stud
			4	SP4412RJL	6548.00	MPP-T, MPP-HT,	100,000	62.75	35.90	9.00	Installed	Field
		600	5	SP6512RJL	8185.00	MPP-MT,	100,000	49.75	57.68	9.00	Installed	Installed
			6	SP6612RJL	9652.00	MPP-PT	100,000	49.75	57.68	9.00	Installed	Lugs

① Dimensions shown are representative of outside box length, width, and depth and do not include allowances for mounting bumps, endwalls, covers, hubs, or hardware protrusions.

② Line lugs are not included. Please order lugs from chart below.

③ A barrel lock provision is included with each metered position.

Lug Kits

Lug Catalog Number	Wire Range	List Price \$
H56476	3/0-800/94 kcmil	46.86
H60162	(2) 1/0-250 kcmil OR (1) #4-600 kcmil	46.86
H68752-1	(3) #6-250 kcmil	78.81
H56732-2	(2) #4-350 kcmil	37.28
H56732-M	(2) #4-500 kcmil	56.00

Note: Lug kits should be chosen based on the wire size being run to the unit. Wire should be sized according to the National Electrical Code. A total of 3 lugs are required to wire the line side of the device.

Hub Kits

Size (inches)	Catalog Number	List Price \$
2	EC56854	178.92
2.5	EC56855	178.92
3	EC56856	178.92
3.5	EC56857	263.06
4	EC56858	119.28
Closure Plate	EC56933S	76.68

Group Metering